

ateljé Lyktan

Hi-Hat high output



Material	Body in metal. Injection moulded shade in opaque acrylic.
Assembly	2-point suspension C/C 70 mm.
Connection	Terminal block 5x2.5 mm ² in canopy. 1-phase through wiring and external cable possible.
Colour	White NCS 0500 G50.
Other	Includes lamp LED 3000K (Ra 80). Chromaticity tolerance 3 SDCM. Rated life 50 000h L70.
Design by	Henrik Schulz



Description	ØxHxW (mm)	Luminaire power	Luminaire flux	Luminaire efficacy	Art.no.	Colour
Hi-Hat	182x100x232	24.5W LED	1718 lm	70.1 lm/W	200585	White
Hi-Hat	182x100x232	24.5W LED	1718 lm	70.1 lm/W	200585-357	White
Hi-Hat	182x100x232	24.5W LED	1718 lm	70.1 lm/W	200585-418	White


Explanation of number suffix:

-357 Microwave sensor hyttronic. Integrated in body on/off.

-418 External digital lighting control DSI/DALI (corridor function). Set value is retained after power failure.

Corridor

100 lux

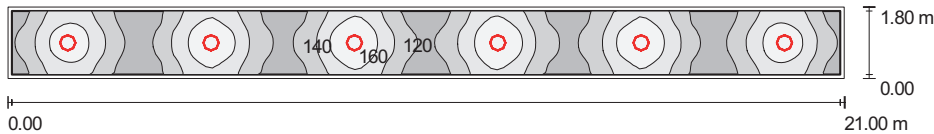

Mounting height: 2.7 m, c-c 3.6 m


Power: 3,81 W/m²

Calculating plane: Emed 105 lx, Emin/Emed 0.779

Interface: 0.100 m

Maintenance factor: 0.80

200 lux

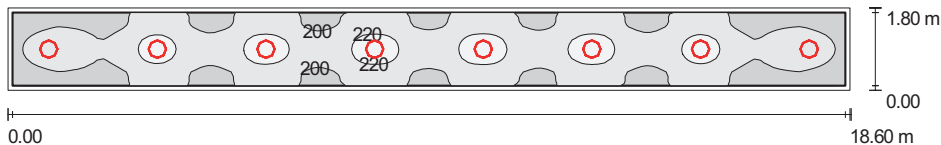

Mounting height: 2,7 m, c-c 2,4 m

Power: 5,73 W/m²

Calculating plane: Emed 156 lx, Emin/Emed 0.775

Interface: 0.100 m

Maintenance factor: 0.80

ateljé Lyktan
SE-296 81 Åhus
Sweden
www.ateljé-lyktan.se