

Time Direct G2

Design by Bengt Källgren.



Material Installation

Frame in extruded aluminium. End caps in cast aluminium.
Pendant: Suspended in 1.5 m wire, wire suspension allows vertical / horizontal adjustment. Friction wire lock.

Ceiling: Frame snaps against the enclosed ceiling profile.

System: First luminaire is supplied with end caps. Eccentric lock connects luminaires mechanically.

Connection

Single luminaire is supplied with halogen-free cable 3G0.75 mm², or 5G0.75 mm² (dimmer).

System start is supplied with halogen-free cable 3G1.5 mm², or 5G1.5 mm² (dimmer). Cable length 1, 2, 3, 4 m and optional quick connector is selected in configurator.

System is supplied excluding cable. Quick connector for electrical connection with system luminaire or system start luminaire.

Standard finish Diffuser

White NCS S0502-Y textured or Grey RAL9006 textured.

Microprismatic acrylic glass together with optical film from Bright-View, reflector in MIRO 5. Optical diffuser in MIRO material together with optical film from BrightView.

Light source

Includes LED light source, colour temperature 3000K or 4000K.

Colour rendering CRI 80 or CRI 90. Chromaticity tolerance max 3 SDCM.

Rated lifetime: L90B10 50 000h.

Driver & Light regulation

Equipped with On/Off driver or DALI driver with light regulation 1-100%.

Set value is maintained in event of power cut. With DALI driver, Touch DIM via external push button and Corridor Mode is possible. The luminaire is equipped with Philips latest generation LED driver Xitanium Touch and DALI to regulate the light with amplitude modulation creating a flicker-free light. Luminaire is equipped with 1 ballast/1 DALI address.

Other

System luminaires are offered as standard with high efficiency luminaire output. Higher luminaire outputs on request (system).

Article Configurator The article no. for each model starts with a basic number according to the selected length of the luminaire and the requested luminaire output. The basic number is followed by a code decided by colour, colour temperature and CRI, light control and type of diffuser. To get a complete article no. please visit our website, www.ateljé-lyktan.com



Time Direct G2 is available as pendant- and ceiling luminaire in the following versions (the exact length for each version, see measurement on page 3 and 4):

- Single
- System start - Start luminaire in row mounting including connection cable and end caps.
- System - For row mounting, excluding connection cable and end caps.

Single luminaires are available in two luminous luminaire flux, High efficiency and High output. System luminaires are available as standard with High efficiency.

Microprismatic acrylic glass

Description	Length (mm)	High efficiency & Power 3000K		High efficiency & Power 4000K		High output & Power 3000K		High output & Power 4000K		CRI
Single	1140	1490 lm	14W	1570 lm	15W	2500 lm	24W	2630 lm	25W	80
Single	1420	1890 lm	18W	1990 lm	19W	2900 lm	29W	3060 lm	31W	80
Single	1700	2290 lm	20W	2410 lm	21W	3300 lm	34W	3480 lm	36W	80
Single	2260	2980 lm	29W	3140 lm	31W	5000 lm	49W	5270 lm	52W	80
Single	2820	3780 lm	35W	3980 lm	37W	5800 lm	59W	6110 lm	62W	80
Single	1140	1490 lm	18W	1570 lm	15W	2500 lm	30W	2630 lm	32W	90
Single	1420	1890 lm	22W	1990 lm	19W	2900 lm	36W	3060 lm	38W	90
Single	1700	2290 lm	25W	2410 lm	21W	3300 lm	43W	3480 lm	45W	90
Single	2260	2980 lm	36W	3140 lm	31W	5000 lm	61W	5270 lm	64W	90
Single	2820	3780 lm	43W	3980 lm	37W	5800 lm	73W	6110 lm	77W	90

* System luminaires are offered as standard with high efficiency luminaire output. Higher luminaire outputs on request (system).

Optical prism >

Time Direct G2

Design by Bengt Källgren.

Time Direct G2 is available as pendant- and ceiling luminaire in the following versions (the exact length for each version, see measurement on page 3 and 4):

- Single
- System start - Start luminaire in row mounting including connection cable and end caps.
- System - For row mounting, excluding connection cable and end caps.

Single luminaires are available in two luminous luminaire flux, High efficiency and High output. System luminaires are available as standard with High efficiency.

Optical prism


Description	Length (mm)	High efficiency & Power 3000K		High efficiency & Power 4000K		High output & Power 3000K		High output & Power 4000K		CRI
Single	1140	1420 lm	14W	1500 lm	15W	2390 lm	24W	2520 lm	25W	80
Single	1420	1800 lm	18W	1900 lm	19W	2770 lm	29W	2920 lm	31W	80
Single	1700	2190 lm	20W	2310 lm	21W	3150 lm	34W	3320 lm	36W	80
Single	2260	2850 lm	29W	3000 lm	31W	4780 lm	49W	5040 lm	52W	80
Single	2820	3610 lm	35W	3800 lm	37W	5550 lm	59W	5850 lm	62W	80
Single	1140	1420 lm	18W	1500 lm	15W	2390 lm	30W	2520 lm	32W	90
Single	1420	1800 lm	22W	1900 lm	19W	2770 lm	36W	2920 lm	38W	90
Single	1700	2190 lm	25W	2310 lm	21W	3150 lm	43W	3320 lm	45W	90
Single	2260	2850 lm	36W	3000 lm	31W	4780 lm	61W	5040 lm	64W	90
Single	2820	3610 lm	43W	3800 lm	37W	5550 lm	73W	5850 lm	77W	90

* System luminaires are offered as standard with high efficiency luminaire output. Higher luminaire outputs on request (system).

ateljé Lyktan

Measure

Pendant

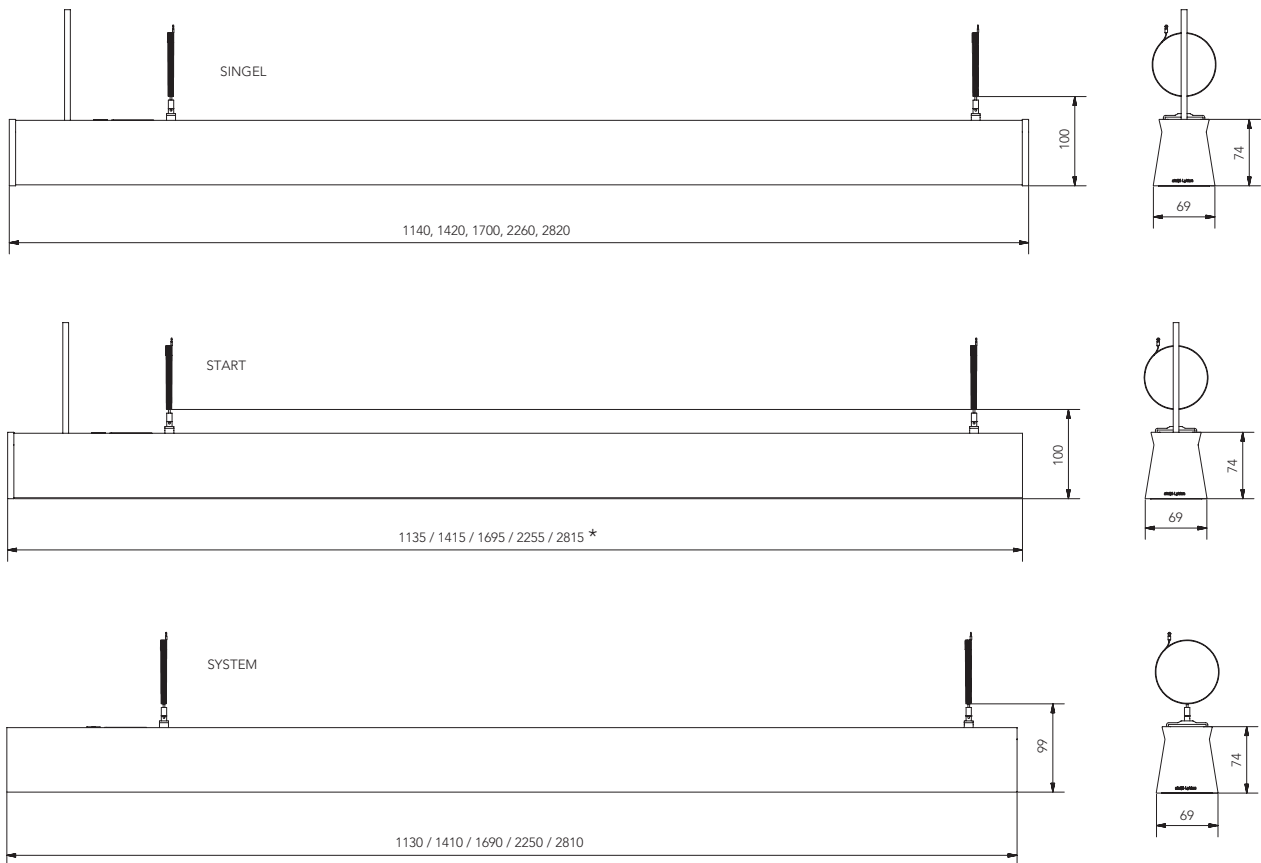



* At the end of the system 5 mm is added for end cap.

ateljé Lyktan



Measure

Ceiling



SINGEL

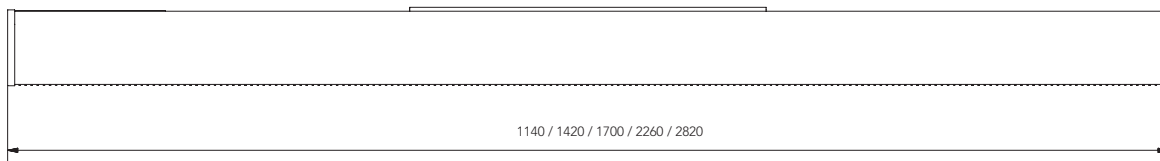

START

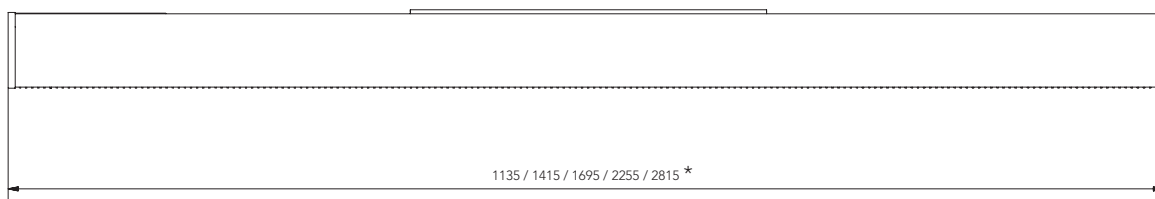

SYSTEM

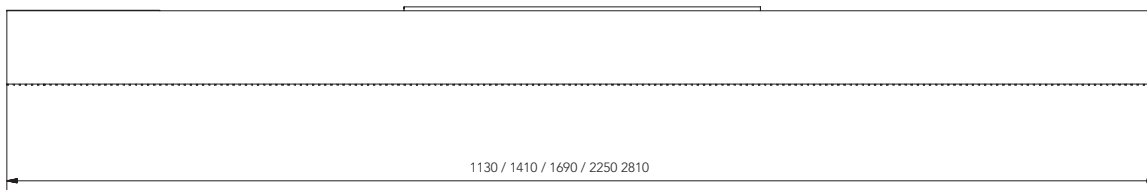

* At the end of the system 5 mm is added for end cap.