




# Bengt Källgren

Bengt Källgren's co-operation with ateljé Lyktan began in 1999 with Rio, a luminaire which can be seen as the predecessor to Time, in terms of its shape and function.


Time was first launched in 2006, and it is currently ateljé Lyktan's most extensive luminaire series.

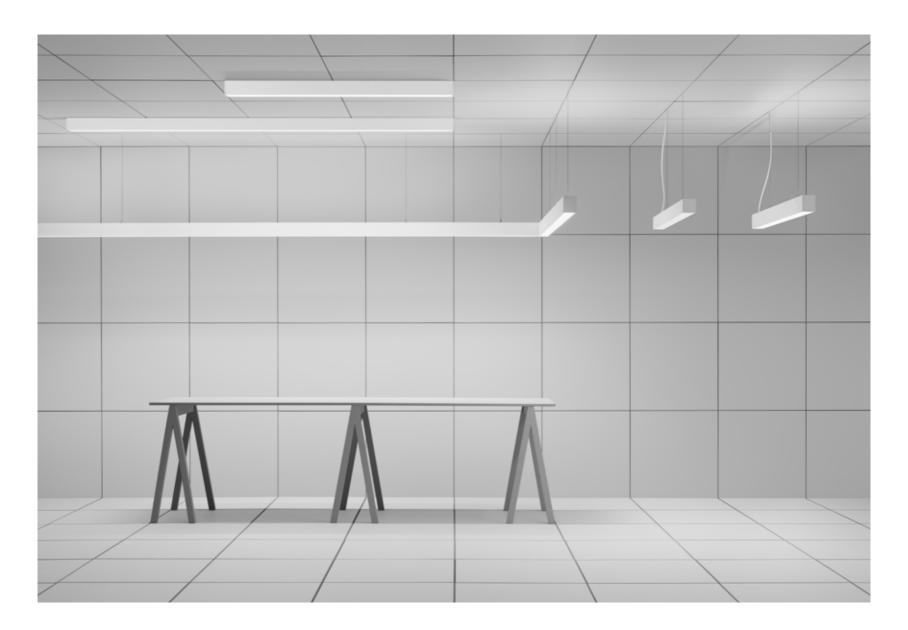

# Time Square


Introducing Time Square, inspired by a well-known architypal design, with balanced proportions and the same unique light engine as the original.


With its timeless design and effective light emission, Time works well as a lighting system, and is designed to last a long time.

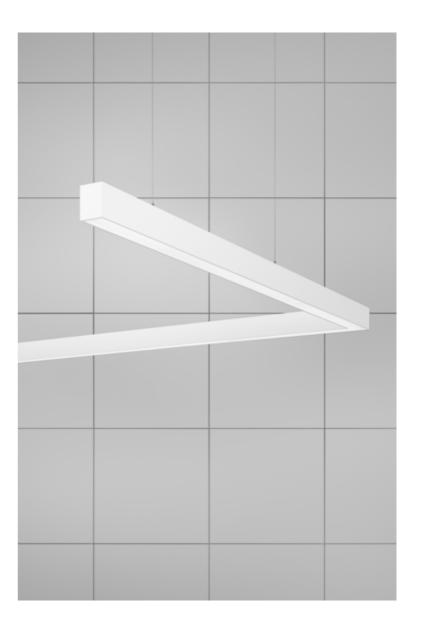

## **Diffusers**

Time Square is available in a choice of of four different types of diffuser. For optimal lighting effect, an optical film with unique qualities is applied above the diffuser.

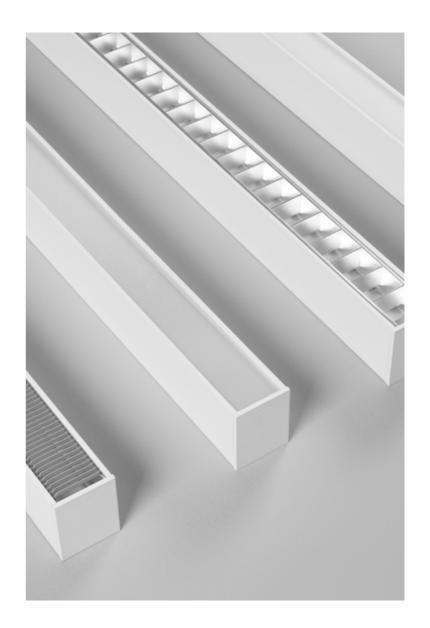

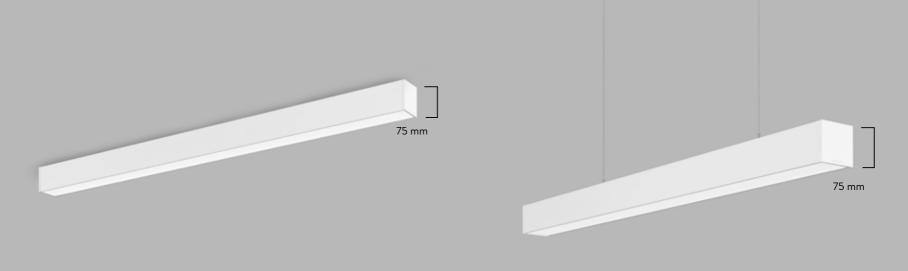


Single LxW (mm)	Start LxW (mm)	System LxW (mm)
Single 1140x66	Start 1140x66	System 1130x66
Single 1420x66	Start 1420x66	System 1410x66
Single 1700x66	Start 1700x66	System 1690x66
<b>Double</b> 2260x66	<b>Double</b> 2260x66	<b>Double</b> 2250x66
<b>Double</b> 2820x66	<b>Double</b> 2820x66	<b>Double</b> 2810x66

Single LxW (mm)	Start LxW (mm)	System LxW (mm)
Single 1140x66	Start 1140x66	System 1130x66
Single 1420x66	Start 1420x66	System 1410x66
Single 1700x66	Start 1700x66	System 1690x66
<b>Double</b> 2260x66	<b>Double</b> 2260x66	<b>Double</b> 2250x66
Double 2820x66	Double 2820x66	Double 2810x66

**Ceiling Direct** 

**Pendant Direct** 

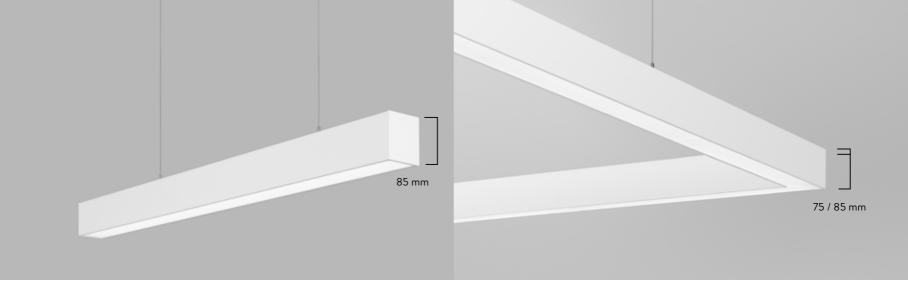

Single LxW (mm)	Start LxW (mm)	System LxW (mm)
Single 1140x66	Start 1140x66	System 1130x66
Single 1420x66	Start 1420x66	System 1410x66
Single 1700x66	Start 1700x66	System 1690x66
<b>Double</b> 2260x66	<b>Double</b> 2260x66	Double 2250x66
<b>Double</b> 2820x66	<b>Double</b> 2820x66	<b>Double</b> 2810x66

90° corner sections creates long lines of light. LxW = 605x605 mm



## Light source

Including Philips Fortimo LED light source, colour temperature 3000K or 4000K.

### Colour rendering:

CRI min. 80 or CRI 90.

#### Chromaticity tolerance:

Max. 3 SDCM.

### Lifespan:

L100\*B10, 50 000h.

Tunable White can be obtained on request.

#### Driver:

The latest generation DALI driver with CLO (Constant Lumen Output) the DALI driver is also used as an on/off swich, that enables lighting systems to be upgraded later on.

Regulates the light with amplitude modulation, creating a flicker-free light. Dimming 1-100%.

<sup>\*</sup> In combination with CLO, standard.



Material Frame in extruded aluminium, end caps in cast

zinc.

**Installation** Supported from wire with 1.5 m wire with

friction lock. Suspension system adjustable

longitudinally and for height.

**Connection** Supplied with 3 m cable and plug with free wire

ends,  $3x0.75 \text{ mm}^2$  or  $5x0.75 \text{ mm}^2$  (dimmable).

**Standard finish** White textured RAL9010 or Grey textured

RAL9006. Other colours available on request.

**Diffusers** - Microprismatic acrylic glass in combination

with optical film from BrightView (the luminaire is also offered with microprism excluding

optical film).

- Optical diffuser in MIRO material.

- Micro lamella louvre in lacquered aluminium in combination with optical film from BrightView.

- Opal frosted acrylic glass.

**Light distribution** Time has both a direct and an indirect light

where the distribution of the light is 30%

downlight and 70% uplight.

Protection class

lp class 20

#### **Head Office**

Fyrvaktaregatan 7, SE-296 81 Åhus, Sweden Tel: +46 (0)44 28 98 00 Fax: +46 (0)44 28 98 38

Email: info@ateljelyktan.se

#### Offices

Stockholm: Hesselmans Torg 9, SE-131 54 Nacka Gothenburg: Fabriksgatan 7, SE-412 50 Gothenburg

Malmö: Slussgatan 10, SE-211 30 Malmö Luleå: Västra Varvsgatan 3, SE-972 36 Luleå

England: 33-34 Dolben Street, GB-SE1 0UQ London Norway: Strandveien 30, Pb 471, N-1327 Lysaker

Finland: Mannerheimintie 113, FI-00280 Helsinki

Russia: Leninskaya Sloboda str. 26, bld. C, office 418, RU-115280 Moscow

The Netherlands: G. van Nijenrodestraat 151, NL-3621 GJ Breukelen

South East Asia: 25 Tagore Lane #03-10, Singapore G Building, Singapore 787602